


SIDE VIEW OF POWERHEAD



27 1/2" D.B.G.

8' [2438.40] TYP.

7' [2133.60]

RAIL BRACKET

8' [2438.40]



1/4" [6.35]

\*24" 6"

LEVELING PLATE

NOTE:  
RAIL LENGTH = PIT DEPTH + TRAVEL + CAB I.D. HEIGHT + 12"

TOP RAIL MUST BE BETWEEN 14" AND 90"

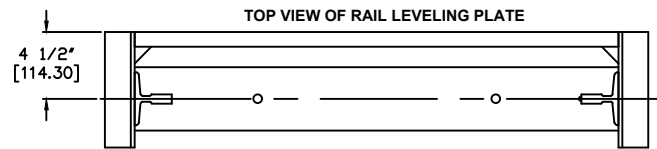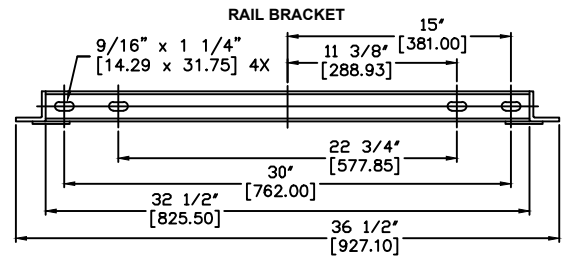

NOTE:  
ALL DIMENSIONS ARE IN INCHES.  
DIMENSIONS IN [ ] ARE MM.

\*BOTTOM RAIL BRACKET CAN BE MOVED IF NEEDED WITHIN THE RANGE NOTED\*

- NOTES:
1. POWERHEAD ANCHOR POINTS WILL BE SPECIFIC TO RAIL BACKING LOCATION.
  2. EACH RAIL SECTION SHALL HAVE A MINIMUM OF ONE RAIL BRACKET.
  3. SPACING CANNOT BE GREATER THAN 8'-0" BETWEEN RAIL BRACKETS.
  4. BRACKET LOCATION MUST BE NO CLOSER THAN 8" TO A RAIL SPLICE.
  5. SEE DRAWING C-003071 FOR RAIL AND PIT FLOOR REACTIONS.

<b>FOX VALLEY ELEVATOR™</b>	1726 North Ballard Road Appleton, WI 54911 Phone: 800-238-8739

ELEVATOR CONTRACTOR:			
JOB NAME:		ORDER NUMBER:	
<b>EXCELEVATOR MRL</b>			
<b>A3-002610</b>			
<b>RAIL LAYOUT</b>			
DRAWN BY:	DATE:	SIGNATURE OF APPROVAL	DWG. NO. <b>C-002914</b>