


C/L RAIL

(4) 1 3/4" x 9 1/2"
LAMINATED VENEER LUMBER (LVL)
HEIGHT OF HOISTWAY IS USED
TO ANCHOR RAIL BRACKETS

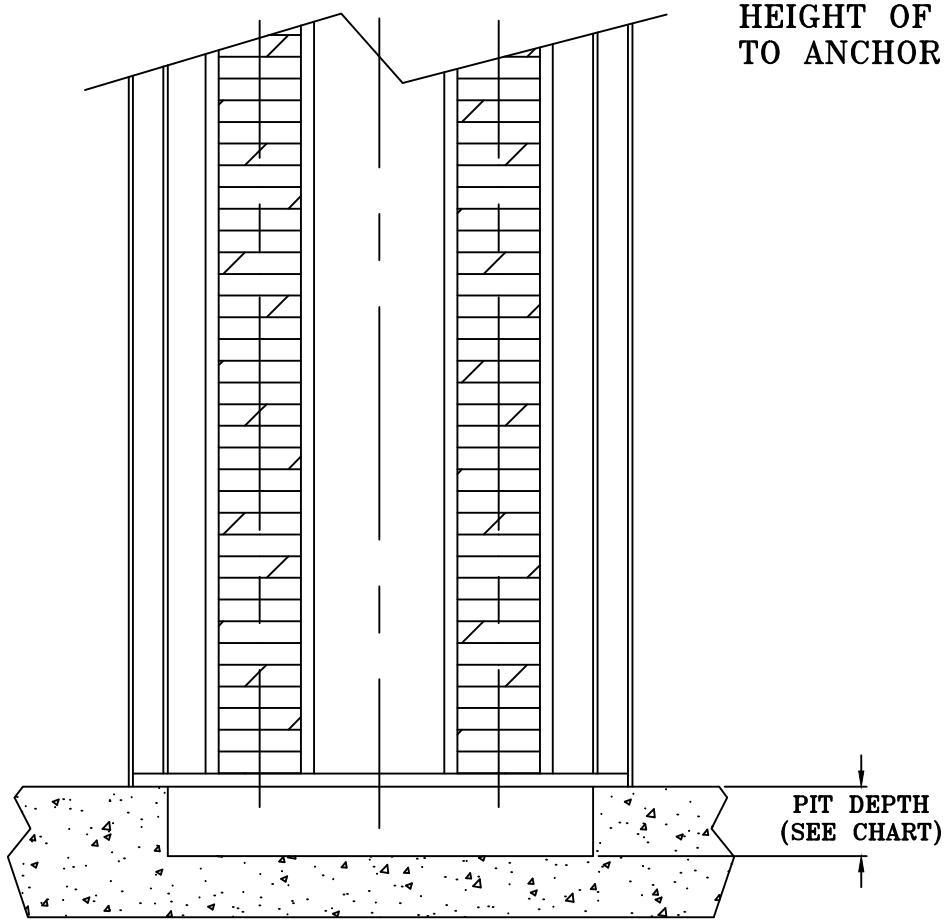

ELEVATOR MODEL	STANDARD PIT DEPTH	
	STANDARD	WITH BUFFER SPRING
EXCELEVATOR	10"	17"
EXCELEVATOR RMR	10"	17"
EXCELEVATOR MRL	10"	17"
PACA-RYDE	8"	15"
PACA-LIFT	8"	15"
PACA-GLIDE	8"	15"

PLEASE CONTACT FOX VALLEY ELEVATOR FOR MINIMUM PIT DEPTH
STANDARD PIT DEPTH IS BASED ON MAXIMUM FLOOR THICKNESS OF 1 3/4"

FOX VALLEY 1726 North Ballard Road
Appleton, WI 54911
Phone: 800-238-8739

ELEVATOR™

ELEVATOR CONTRACTOR: _____

JOB NAME: _____ ORDER NUMBER: _____

**UNIVERSAL RAIL BACKING
FOR PACA & EXCELEVATOR
SERIES ELEVATORS**

DRAWN BY: _____	DATE: _____	SIGNATURE OF APPROVAL _____	DWG. NO. C-003015
-----------------	-------------	-----------------------------	-----------------------------

NOTE:
THIS DRAWING DEPICTS SAMPLE CONSTRUCTION ONLY.
IT IS THE RESPONSIBILITY OF THE INSTALLER,
CONTRACTOR, OR ENGINEER TO DESIGN AND SPECIFY
STRUCTURAL SUPPORTS. ALL CONSTRUCTION TO BE IN
COMPLIANCE WITH LOCAL CODES.