


RESIDENTIAL ELEVATORS AT A GLANCE

Our elevators are fully code compliant, so you can have peace of mind that your family will enjoy a dependable, safe, and smooth ride in your Fox Valley Elevator unit. If you are building a new home or remodeling your current home to fit an elevator, you can trust that Fox Valley Elevator will have what you are looking for. Please reference Fox Valley Elevator's Planning Guides and Brochures for more detailed information.

Excelevator Series Excelevator-RMR Excelevator-Hydraulic Excelevator-MRL Roped Hydraulic Machine Roomless Reduced Machine Room Winding Drum Winding Drum Series 114 Series 022 Series 021

- Sling: Durable cantilever design with movement that translates through roller wheels, enhancing ride quality
- Car Size: Maximum of 15 sq. ft.
- Capacity: Up to 1,000 lbs.
- Travel: Up to 50 ft.
- Stops: Up to 6
- Nominal Speed: 40 feet per minute
- Guide Rail: Rigid design built on 8 lb. industry standard T-Rail system
- Pit Depth: 10" minimum; 12" recommended
- Overhead needed:
 - Cab Height + 12" (RMR & Hydraulic)
 - Cab Height + 26" minimum (MRL)
- **Minimum Cab Height:** 6' (RMR, MRL, Hydraulic)
- Standard Features: Emergency descent with battery backup, automatic homing, manual lowering, and numerous safeties

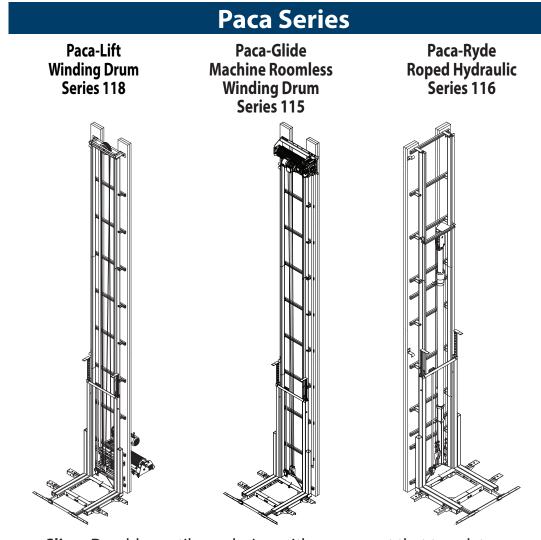

- Sling: Durable cantilever design with movement that translates through gliding blocks
- Car Size: Maximum of 15 sq. ft.
- Capacity: Up to 1,000 lbs.
- Travel: Up to 50 ft.
- Stops: Up to 6
- Nominal Speed: 40 feet per minute
- Guide Rail: Modular design built on proprietary J-Rail system
- Pit Depth: 8" minimum; 12" recommended
- Overhead needed:
 - Cab Height + 12" (Paca-Lift & Paca-Ryde)
 - Cab Height + 26" minimum (Paca-Glide)
- Minimum Cab Height: 6'8" (Paca-Lift & Paca-Glide), 6'10" (Paca-Ryde)
- Standard Features: Emergency descent with battery backup, automatic homing, manual lowering, and numerous safeties

Custom Lift Series

Custom Lift Winding Drum Series 210



- Sling: Cantilever design with movement that translates through gliding blocks
- Car Size: Maximum of 12 sq. ft.
- Capacity: Up to 500 lbs.
- Travel: Úp to 50 ft.
- Stops: Up to 6
- Nominal Speed: 32 feet per minute
- Guide Rail: Compact design built on proprietary C-Rail system
- Pit Depth: 6" minimum
- Overhead needed:
 - Cab height + 12"
- Minimum Čab Height: 6' 6"
- **Standard Features:** Automatic homing, manual lowering, and numerous safeties